

TILT-TOWERTIRE CHANGER



TILT-TOWER

The pneumatic Tilt-Tower post provides maximum clearance for installing the tire on the turntable.



ON-FLOOR BEAD BREAKER (PEDAL-OPERATED)

Traditional side-shovel bead breaker with ergonomic pedal-control positioned away from the shovel; the fastest solution for standard, soft sidewall, and high-aspect tires.




TABLETOP BEAD SEATER

A direct burst of compressed air comes through the clamping jaws to facilitate bead seating.



T5300T

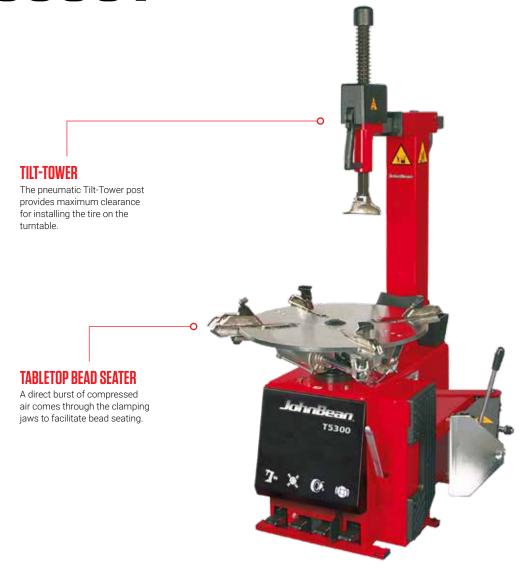

TECHNICAL SPECIFICATIONS

Max Rim Diameter	22" 56cm
Max Tire Width	13" 33cm
Max Wheel Diameter	39" 100cm
Power Supply	230V 1ph 50-60Hz 16A
Air Pressure Required	116-174 PSI 8-12 bar
Dimensions HxWxD	63"x73"x45" 160x185x115cm

STANDARD ACCESSORIES

- 1 kg Lube Bucket Holder
- Bead Lever Plus
- Plastic Protectors

OPTIONAL ACCESSORIES

- 5 kg Lube Bucket Holder
- Lube Lube Brush
- Bead Lever Protector Plus
- Plastic Rim Protector. Clip-on Type
- · Bead Breaker Blade Sleeve
- Light Alloy Rim Protector for Center Type Fixed Jaws - Front
- Wheel Lift







