

TEST LANE



TEST LANE FOR CARS AND VANS

Modular system upgradeable into test lane

TL204-RP

JohnBean



TEST LANES TO MEET YOUR INDIVIDUAL REQUIREMENTS

For many years the name of John Bean has been a synonym for engineering and manufacturing of testing and diagnostics technology for cars and trucks.

Our customers benefit from concentrated competence and direct and smooth handling of enquiries and orders.

A qualified team, the well-known product quality, good service and the advantages of the strong global Snap-on Group guarantee testing technology which is constantly optimised in terms of customer requirements.

The TL 204®-RP is the optimum test lane for check-in, final inspection, tests in line with government standards, and training classes. The vehicle test in the presence of your customer and the relative print-out make diagnostics much more transparent and increase your customers' confidence.



MODULAR DESIGN

Owing to the modular design it is possible to buy test lane components step by step:

Basis is the brake tester, whereas suspension tester and side-slip tester can be retrofitted at a later date.

All components of John Bean testing equipment can be combined at customer's discretion.



BASIC MODULE – BRAKE TESTER

Additional modules:

- suspension tester
- side-slip tester

Display modules:

- workstation
- alternatively 32" display kit
- alternatively 42" display kit



CUSTOMISED OPERATION OF TESTING EQUIPMENT

Brakes and shock absorbers are wear parts and there are numerous possible defects which might occur.


Regular diagnostics with results documented on the test record provide an additional service and profit for your shop. The complete vehicle test can be accomplished with the fully automatic test sequence where all testing units (brake tester, suspension tester and slide-slip tester) start automatically.

Due to short test cycles of 2 to 3 minutes each, shop technicians can noticeably increase their productivity. Additionally with the fully automatic mode employed a remote control unit is not required.

The features to be tested are detected by means of well-proven strain-gauge type load cells. This wear-free measuring system ensures reliable and error-free measurement of the forces produced.

USER-FRIENDLY REMOTE CONTROL

The optional radio remote control unit can be used to control the testing equipment from driver's seat at the entire discretion of the operator, e.g. by starting the brake tester only, or by conducting the tests in the sequence he prefers.

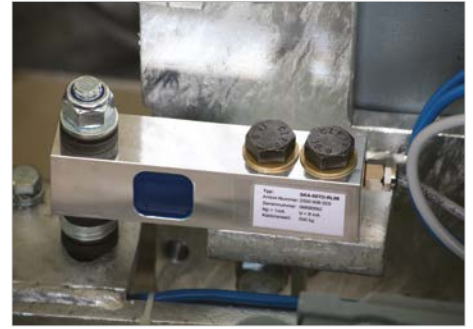

BASIC MODULE – BRAKE TESTER

Standard equipment of the roller sets:

- Mechanics in compact or split flat design, galvanised and consequently suitable for outdoor installation
- Composite coated rollers, or steel rollers in SmoothGrip design
- Roller sets are equipped with rust-proof feeler rolls
- Splash-proof motors
- Measurement with wear-free strain-gauge type load cells
- Electric automatic drive-off aid
- 4WD mode (counter rotation) – operation with radio remote control or auto detection
- Dual direction testing – radio remote control unit required

The brake tester, which forms the basic unit of the test lane, is also available with braking motors (3.7 kW motors only).

The basic brake test covers the following measurements/calculations:

- rolling resistance
- ovality
- braking force imbalance left/right
- braking force left/right
- braking efficiency





RP BOX

Latest technology for highest flexibility. The RP box with integrated electronics is the technological core of the system. Communication with the workstation or the display kit is wireless, which allows flexible and simple installation.

ADDITIONAL MODULES

SUSPENSION TESTERS

ST 202-E - Eusama-based suspension tester

ST 202-T - Theta-type suspension tester

Shock absorbers wear slowly so that customers often do not recognise it. In less than a minute the suspension tester enables you to determine the cause of dangerous cornering abilities, irregular tyre wear, steering wheel vibrations, insufficient driving stability in case of cross winds, and poor braking performance.

Two different measuring systems are available:

EUSAMA-BASED SUSPENSION TESTER

Two independent test plates determine vehicle chassis vibrations as they phase out. The forces thus produced, which might adversely effect the vibratory behaviour of the vehicle, are detected and calculated (dynamic analysis).

THETA-TYPE SUSPENSION TESTER

This simple-to-operate suspension tester provides an unmistakable and highly accurate procedure for evaluation of suspension values. The evaluation is based on determination of the damping ratio δ according to Lehr, with a limit value being defined where wheel suspension no longer guarantees sufficient vehicle safety.

NOISE TEST MODULE

The suspension testers can be equipped with the optional noise test module as conventional techniques hardly allow localising any noise on or inside the vehicle. With this noise test module every single wheel can be set into vibration by operating the remote control unit.

In the test cycle to follow, which is started either manually, or automatically, the noise is easily localised.

SIDE-SLIP TESTER TT 204

The side-slip tester is designed to measure toe of the vehicle under test immediately. No additional tests are necessary as the testing plate is positioned directly in front of the suspension or brake tester and the vehicle simply rolls over. The data automatically detected supplies a sound diagnostics of toe-in and toe-out. The measured value is read out in 0 ± 20 mm/m.



DISPLAY MODULES

WORKSTATION



The workstation is supplied with control unit, 27" TFT flat screen, A4 inkjet printer, keyboard and mouse and an extended software package.

PORTABLE CONTROLLER DEVICE

In addition to the workstation the test lane can be operated by means of a portable controller device such as a tablet PC.

VIRTUAL ANALOGUE DISPLAY



As an alternative to the workstation one of the following display kits is available:

- 32" display kit
 - 42" display kit
- with basic software package

The display kit can be mounted on the wall or on the stand.

SOFTWARE PACKAGE

	Basic (display kit)	Extended (workstation)
Brake, suspension, side slip test	•	•
Noise detection		•
4WD mode		•
Result evaluation with limit values according to vehicle type		•
Print-out	basic	full
Data input		•
Data base		•
Networking		•
ASA Livestream (or similar)	•	•
Some functions require the radio remote control		

OPTIONS

OPTIONAL BUILT-IN FRAME

These built-in frames considerably facilitate preparation of foundations. There is no need to embed in concrete a steel beam with edge guards which is otherwise inevitable. None the less built-in frames are always exactly level with ground.

OPTIONAL ROLLER COVER PLATES



Drive-over axle load 1.4 t

OPTIONAL PNEUMATIC LIFTING DEVICE



As the lifting device raises the vehicle to ground level, driving in and off the rollers is considerably facilitated and hence especially advantageous for vehicles with sports chassis, low ground clearance, or small wheel diameters where damage to the underbody is very likely under usual conditions.

Note: suitable foundation must be available.
8 bar compressed-air supply required.
Lowering / lifting capacity 3 t.

TECHNICAL DATA

General		TL 204 [®] -RP K	TL 204 [®] -RP K 5	TL 204 [®] -RP G	TL 204 [®] -RP G 5
Scope of application (with limitation of drive-over load and test weight as specified) (1)		M1, N1	M1, N1	M1, N1	M1, N1
Design of mechanics		compact	compact	split	split
Temperature range (without additional heating system)	°C	0 to +40	0 to +40	0 to +40	0 to +40
Power supply		3/N/PE 400 VAC 50 Hz	3/N/PE 400 VAC 50 Hz	3/N/PE 400 VAC 50 Hz	3/N/PE 400 VAC 50 Hz
Fuse rating - slow blow type	A	3 x 25	3 x 25	3 x 25	3 x 25
RP box - dimensions	mm	500 x 500 x 200	500 x 500 x 200	500 x 500 x 200	500 x 500 x 200
RP box - weight	kg	20	20	20	20
Workstation - dim. (W x H x L)	mm	750 x 1700 x 530	750 x 1700 x 530	750 x 1700 x 530	750 x 1700 x 530
Workstation - weight	kg	63	63	63	63
32" display kit - dim. (W x H x L)	mm	740 x 450 x 250	740 x 450 x 250	740 x 450 x 250	740 x 450 x 250
32" display kit - weight	kg	23	23	23	23
42" display kit - dim. (W x H x L)	mm	1030 x 680 x 330	1030 x 680 x 330	1030 x 680 x 330	1030 x 680 x 330
42" display kit - weight	kg	32	32	32	32

(1) Vehicle categories according to EU standards, M1: Vehicles for the carriage of passengers and comprising not more than eight seats in addition to the driver's seat, N1: Vehicles for the carriage of the goods and having a maximum mass not exceeding 3.5 tonnes

TECHNICAL DATA

Roller brake tester		TL 204 [®] -RP K	TL 204 [®] -RP K 5	TL 204 [®] -RP G	TL 204 [®] -RP G 5
Drive-over load/axle	kg	4000	4000	4000	4000
Test weight/axle (70% efficiency - ISO 21069)	kg	1750	2000	1750	2000
Roller coefficient dry/wet		> 0.7 / > 0.6	> 0.7 / > 0.6	> 0.7 / > 0.6	> 0.7 / > 0.6
Measuring range	kN	0-8	0-8	0-8	0-8
Maximum brake force	kN	6	7	6	7
Motor power	kW	2 x 3.7	2 x 5	2 x 3.7	2 x 5
Test width min. - max. - for roller length 700 mm - for roller length 1000 mm	mm mm	800-2200 800-2800	800-2200 800-2800	variable variable	variable variable
Roller diameter	mm	216	216	216	216
Roller length	mm	700 or 1000	700 or 1000	700 or 1000	700 or 1000
Roller elevation	mm	level	level	level	level
Roller distance	mm	400	400	400	400
Wheel diameter min. - max.	mm	400 - 900	400 - 900	400 - 900	400 - 900
Anti-corrosion finish: galvanisation	DIN	50976-t Zno	50976-t Zno	50976-t Zno	50976-t Zno
Idling speed	km/h	5.4	5.4	5.2	5.2
Dimensions of roller set without options (L x W x H) - for roller length 700 mm - for roller length 1000 mm	mm mm	670x2305x255 670x2905x255	670x2305x255 670x2905x255	1040x940x243each 1040x1240x243each	1040x940x243each 1040x1240x243each
Weight of roller set without options - for roller length 700 mm - for roller length 1000 mm	kg kg	400 450	400 450	250each 280each	250each 280each

Eusama-based suspension tester

Drive-over load/axle	kg	3000	3000	3000	3000
Test weight/wheel for suspension test min./max.	kg	75/1000	75/1000	75/1000	75/1000
Test weight/wheel for weight measurement min./max.	kg	75/1500	75/1500	75/1500	75/1500
Measuring range	%	0-100	0-100	0-100	0-100
Test width min. - max.	mm	900-2100	900-2100	variable	variable
Exciter frequency	Hz	24	24	24	24

TEST LANE FOR CARS AND VANS

TECHNICAL DATA

Eusama-based suspension tester		TL 204 [®] -RP K	TL 204 [®] -RP K5	TL 204 [®] -RPG	TL 204 [®] -RP G5
Exciter stroke	mm	6	6	6	6
Motor power	kW	1 x 3	1 x 3	2 x 3	2 x 3
Mechanics - dim. (LxWxH)	mm	400x2350x255	400x2350x255	400x1390x255each	400x1390x255each
Mechanics - weight	kg	320	320	175each	175each

Theta-based suspension tester					
Drive-over load/axle	kg	2500	2500		
Test weight/axle	kg	2200	2200		
Measuring range		0-0.35	0-0.35		
Test width min. - max.	mm	800-2200	800-2200		
Exciter frequency	Hz	approx. 10	approx. 10		
Exciter stroke	mm	6.5	6.5		
Motor power	kW	2 x 1.1	2 x 1.1		
Mechanics - dim. (LxWxH)	mm	800x2350x286	800x2350x286		
Mechanics - weight	kg	500	500		

Side-slip tester					
Drive-over load/axle	kg	4000	4000	4000	4000
Measuring range	mm/m	0 +/- 20	0 +/- 20	0 +/- 20	0 +/- 20
Mechanics - dim. (LxWxH)	mm	500x570x50	500x570x50	500x570x50	500x570x50
Mechanics - weight	kg	25	25	25	25

EMEA-JA
Snap-on Equipment s.r.l. - Via Prov. Carpi, 33 - 42015 Correggio (RE)
Phone: +39 0522 733-411 - Fax: +39 0522 733-479 - www.johnbean-europe.com

Austria
Snap-on Equipment Austria GmbH - Hauptstrasse 24/Top 14 - A-2880 St. Corona/Wechsel (RE)
Phone: +43 1 865 97 84 - Fax: +43 1 865 97 84 29 - www.johnbean-europe.com

France
Snap-on Equipment France - ZA du Vert Galant -15, rue de la Guivernone BP 97175
Saint-Ouen-l'Aumône - 95056 Cergy-Pontoise CEDEX
Phone: +33 134 48 58-78 - Fax: +33 134 48 58-70 - www.johnbean-france.fr

Germany
Snap-on Equipment GmbH - Konrad-Zuse-Straße 1 - 84579 Unterneukirchen
Phone: +49 8634 622-0 - Fax: +49 8634 5501 - www.johnbean-deutschland.com

Italy
Snap-on Equipment s.r.l. - Via Prov. Carpi, 33 - 42015 Correggio (RE)
Phone: +39 0522 733-411 - Fax: +39 0522 733-410 - www.johnbean-italia.com

United Kingdom
Snap-on Equipment Ltd. - Unit 17 Denney Road, King's Lynn - Norfolk PE30 4HG
Phone: +44 118 929-6811 - Fax: +44 118 966-4369 - www.snapon-equipment.co.uk

